



OUTLINE DIMENSION DRAWING FOR 3 PHASE SQUIREL CAGE TEFC FOOT MOUNTED INDUCTION MOTORS

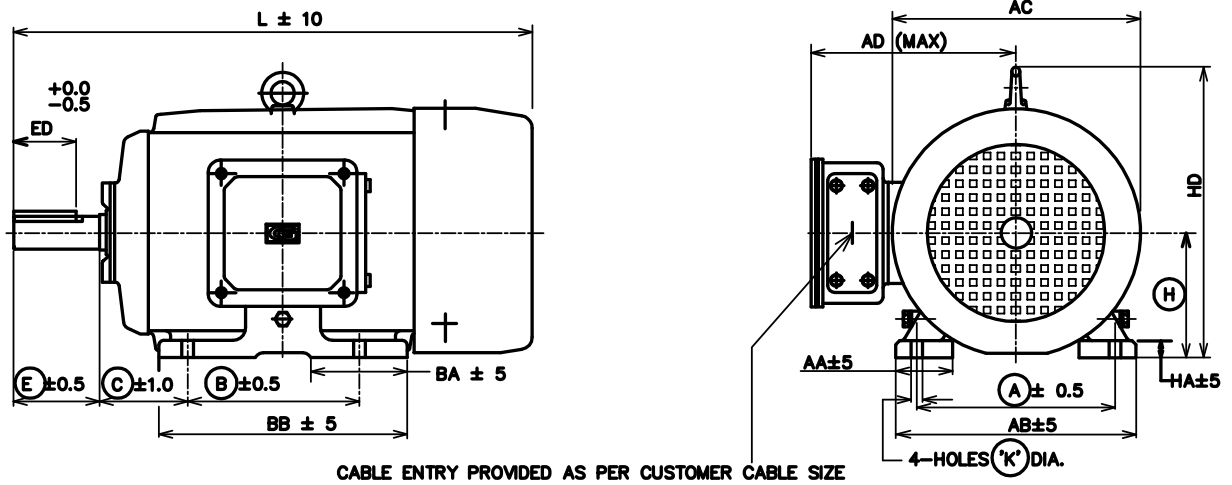

Y-THREADED CENTRE HOLES
AS PER IS: 2540-1963



VIEW FROM DE SIDE.

RINGED DIMENSIONS ARE AS PER IS: 1231
ALL DIMENSIONS ARE IN mm.

| Frame | A | B | C | H | AA | AB | BA | BB | K | D | E | ED | F | GD | G | Y | AD | AC | L | HD | HA |
|-------|-----|-----|----|--------------|----|-----|----|-----|--------------|------------------|----|----|---------------|---------------|--------------|-------|-----|-----|-----|----|----|
| ND80 | 125 | 100 | 50 | 80.0 79.5 | 35 | 152 | 45 | 124 | 10.0 10.5 | 19.009 18.996 | 40 | 27 | 6.00 5.970 | 6.00 5.943 | 15.0 14.8 | M6x16 | 134 | 170 | 285 | - | 11 |

| | | | | | | | | | | | |
|----------------------|--|--|---------------------------|--|--|--|------------|--------|--|----------|--|
| CUSTOMER: - | | | kW: - | | | | | | | | |
| P.O.No.: - | | | FRAME: -ND80 | | | | | | | | |
| ENQ./IND.No.: - | | | RPM: - | | | | | | | | |
| CONSULTANT/CLIENT: - | | | M/C.No.: - | | | | | | | | |
| DRN. | | | BROOK CROMPTON | | | | DRG. No. | ND8050 | | 4POLE | |
| CHD. | | | | | | | SR.No: 001 | | | REV.No.0 | |
| APPD. | | | | | | | | | | | |